

8580-PWR

Premium Wax/Resin Thermal Transfer Ribbon

A premium blend that allows for the highest image durability for a wax/resin formulation. 8580's very sharp print quality allows simultaneous ladder and rotated barcode printing while offering enhanced scratch and smudge resistance. Additionally, this ribbon provides enhanced durability which ensures long-lasting labels for reliable supply chains as well as great chemical resistance in a wide variety of industries.

RECOMMENDED APPLICATIONS:



RIBBON PROPERTIES:


Ink Formulation	Wax/Resin
Color	Black
Base Film Thickness	4.8 µm.
Total Thickness	8.3 µm.
Ink Transfer Temperature	167°F/75°C
Print speed up to	7 IPS

CERTIFICATIONS:

FDA
REACH
RoHS
UL

SUBSTRATE COMPATIBILITIES:

Paper
Synthetics

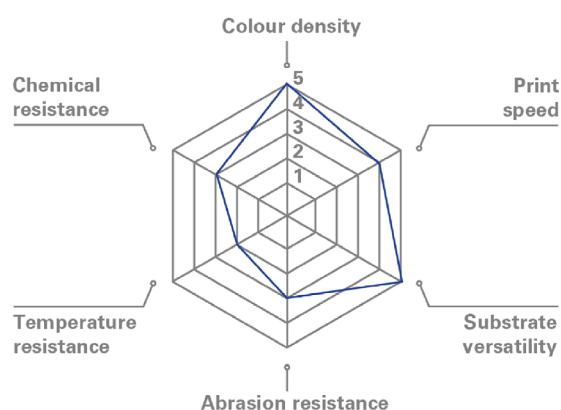

Store between 5-35°C, 20-80% relative humidity, keep away from heat and direct sunlight.

The information on this data sheet was obtained in manufacturer laboratories and is subject to change without notification. Please note that measured values may vary slightly when tested in a different environment.

Why choose Genuine Supplies?

Guaranteed Quality

Genuine Supplies are manufactured to strict quality standards to ensure optimum performance and user satisfaction.

Guaranteed Compatibility

From core to cut, Genuine Supplies are designed to work flawlessly through your TSC & Printronix Auto ID printer.

Consistent Performance

From the first label to the last and from one order to the next, Genuine Supplies will provide clear, crisp imaging and consistent performance.

"No Worry" Reliability

Quality control, manufacturing and component standards ensure "No Worry" reliability.



Powered by



A **TSC** Company

CONTACT OUR SUPPLIES EXPERTS

TSC Auto ID Technology EMEA GmbH | Georg-Wimmer-Ring 8b | 85604 Zorneding | Germany

emea_sales@tscprinters.com | +49 (0) 8106 37979 000 | TSC Auto ID [tscprinters.com](https://www.tscprinters.com)